

TAIKO KONG

Taiko Kong TK11(8)



Dual Receiving

10W High Power



Receiving Band

0.5~1160MHz

Transmitting Band

25~29.8MHz/50~54MHz
136~174MHz/350~490MHz

Support Receiving

AM

SSB

FM

Universal/Smart
Code Breaking



Big Battery

3000mAh

NOAA (Support SAME Decoding)




Spectrum Analyzer

Frequency Meter



Magic Voice
(Infantlike/
Alien Voice)



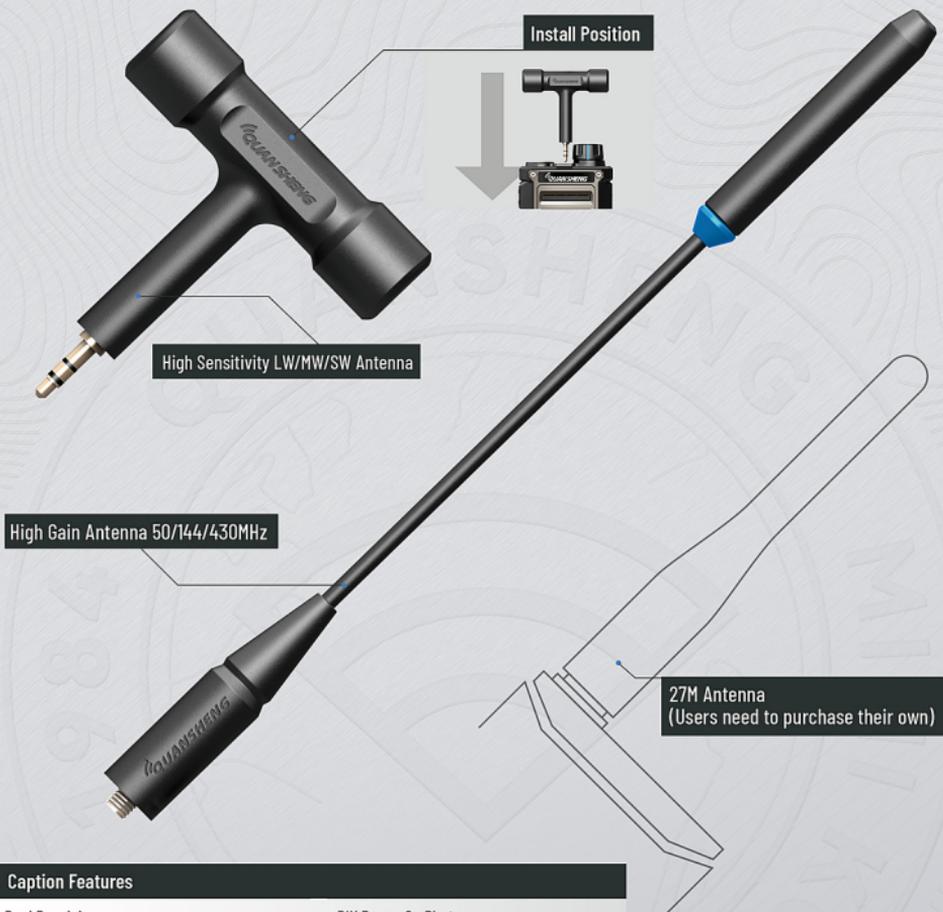

Caption Features

Dual Receiving	DIY Power On Photo
Receiving Band: 0.5~1160MHz	Customized Call End Tone
Transmitting Band: 25~29.8MHz、50~54MHz、 136~174MHz、350~490MHz	Field Strength
Support AM/SSB/FM Receiving	Frequency Meter
Universal/Smart Code Breaking	5 Tone Select call
10W High Power	Customized VFO Scan Range
NOAA (Support SAME Decoding)	999 Channels
Spectrum Analyzer	Base Charger/Type-C Charging
Magic Voice (Infantlike/Alien Voice)	3000mAh Big Battery
	Metal Shell, Robust Protection

Basic Functions

Support English/Chinese Menu
Wireless Radio Replication
Emergency Alarm
10-Group Scrambler
Power-On Password
Noise Reduction Function
One Key Call Channel
Cross-Band Intercom
DTMF ANI
DTMF Select Call, Supporting Individual/Group/Full Call
1750HZ Call Tone
Frequency/Channel Mode Shift
Voice Prompt (English/Chinese)
Multi-Scan
Jacklight
Keypad Lock

Remote Kill/Revive
Backlight Auto Off Time Selective
H/M/L Output Power Selective
Multi Step Frequency
Onsite Programming
Reset Function
PC Programmable
CTCSS/DCS
VOX
Busy Channel Lock
Chanel No./Channel Frequency/Channel Name
Multi-Display Mode
Channel Scan & Add
Large LCD Display
Repeater Forwarding Confirmation Function
Monitor

Diagram



Standard Accessories



Optional Accessories



General Specification


Channel Number	999
NOAA Channel Number	10
FM Radio Store Number	32
Voltage	7.4V
Battery Capacity	3000mAh
Dimension	126mm X 58mm X 34.5mm
Weight	301g
Screen	1.44-inch ice blue display
Keypad	Front 19 keys Left 2 PTT keys & 2 shortcut keys
Speaker	16Ω 1W
Jacklight	Support
Working Temperature	-20°C ~60°C
Antenna Impedance	50Ω
Frequency Stability	±1ppm
Modulation Mode	FM:11K0F3E(12.5KHz) 16K0F3E(25KHz)
Charging Method	Base Charger/Type-C Charging

Transmitting

Transmitting Frequency Band	25-29.8MHz	≤5W
	50-54MHz	≤5W
	136-174MHz	≤10W
	350-490MHz	≤10W
Output Power	10W	
Emission Current	≤2.5A	
Maximum Frequency Deviation	≤5KHz(25KHz),≤2.5KHz(12.5KHz)	
Modulation Distortion	≤5%	
Stray Emission	≤7.5uW	
Adjacent Channel Power	70dB(25KHz),60dB(12.5KHz)	
Residual Modulation	40dB	

Receiving

Receiving Frequency Band	0.15-1160MHz
FM Reference Sensitivity	-121dBm
WFM Reference Sensitivity	-108dBm
AM Reference Sensitivity	-100dBm
Audio Power	≥0.5W
Audio Distortion	≤10%

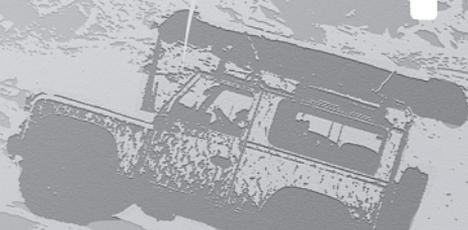

TK11(8)

